

+

A

04/19/00

UTILITY PATENT APPLICATION TRANSMITTAL <small>(Only for new nonprovisional applications under 37 CFR 1.53(b))</small>		Attorney Docket No.	35.C14439	
		First Named Inventor or Application Identifier		
		TSUKASA SAKO		
		Express Mail Label No.		
APPLICATION ELEMENTS <small>See MPEP chapter 600 concerning utility patent application contents.</small>		ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231		
1. <input checked="" type="checkbox"/> Fee Transmittal Form <small>(Submit an original, and a duplicate for fee processing)</small>				
2. <input checked="" type="checkbox"/> Specification <small>Total Pages</small>	35			
3. <input checked="" type="checkbox"/> Drawing(s) (35 USC 113) <small>Total Sheets</small>	11			
4. <input checked="" type="checkbox"/> Oath or Declaration <small>Total Pages</small>	1			
a. <input type="checkbox"/> Newly executed (original or copy)		6. <input type="checkbox"/> Microfiche Computer Program (Appendix)		jc564 U.S. PRO 09/552590 04/19/00
b. <input checked="" type="checkbox"/> Unexecuted for information purposes		7. Nucleotide and/or Amino Acid Sequence Submission <small>(if applicable, all necessary)</small>		
c. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) <small>(for continuation/divisional with Box 17 completed)</small> [Note Box 5 below]		a. <input type="checkbox"/> Computer Readable Copy		
i. <input type="checkbox"/> DELETION OF INVENTOR(S) <small>Signed Statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).</small>		b. <input type="checkbox"/> Paper Copy (identical to computer copy)		
5. <input type="checkbox"/> Incorporation By Reference (useable if Box 4c is checked) <small>The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4c, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.</small>		c. <input type="checkbox"/> Statement verifying identity of above copies		
ACCOMPANYING APPLICATION PARTS				
8. <input type="checkbox"/> Assignment Papers (cover sheet & document(s))				
9. <input type="checkbox"/> 37 CFR 3 73(b) Statement <input type="checkbox"/> Power of Attorney <small>(when there is an assignee)</small>				
10. <input type="checkbox"/> English Translation Document (if applicable)				
11. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations				
12. <input type="checkbox"/> Preliminary Amendment				
13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) <small>(Should be specifically itemized)</small>				
14. <input type="checkbox"/> Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application <small>Status still proper and desired</small>				
15. <input type="checkbox"/> Certified Copy of Priority Document(s) <small>(if foreign priority is claimed)</small>				
16. <input type="checkbox"/> Other: _____				
17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information: <input type="checkbox"/> Continuation <input type="checkbox"/> Divisional <input type="checkbox"/> Continuation-in-part (CIP) of prior application No. ____/____				
18. CORRESPONDENCE ADDRESS				
<input checked="" type="checkbox"/> Customer Number or Bar Code Label		05514 <small>(Insert Customer No. or Attach bar code label here)</small> or <input type="checkbox"/> Correspondence address below		
NAME				
Address				
City	State	Zip Code		
Country	Telephone	Fax		

+

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	28-20 =	8	X \$ 18.00 =	\$144.00
	INDEPENDENT CLAIMS (37 CFR 1.16(b))	6-3 =	3	X \$ 78.00 =	\$234.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$0
				BASIC FEE (37 CFR 1.16(a))	\$690.00
	Total of above Calculations =				\$1068.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$1068.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 1068.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	Jack M. Arnold
SIGNATURE	<i>Jack M. Arnold Reg. No. 25,823</i>
DATE	April 18, 2000

IMAGE PROCESSING APPARATUS, METHOD
AND STORAGE MEDIUM THEREFOR

BACKGROUND OF THE INVENTION

5 Field of the Invention

The present invention relates to an image processing apparatus capable of image taking, a method and a storage medium therefor.

10 In the medical field, the diagnosis with image has meant observation of the image recorded on the X-ray film on the film viewing light box (schaukasten).

However, the ordinary X-ray film is so designed as to have a high image contrast in an easily observable density range of about 1.0 to 1.5D in order to
15 facilitate the observation of the body part to be diagnosed, so that even a slight aberration in the image taking condition results in an overexposure or an underexposure, thus detrimentally affecting the diagnosis by image reading.

20 Particularly in case of divided image taking, the image contrast and object of diagnosis are different respectively for the diagnosed parts recorded in the divided areas on the film, so that various efforts have been made for obtaining the desired images.

25 On the other hand, with the recent progress in computer technology, computerization has been introduced also in the medical field. This trend is

evident also in the diagnosis with image, including remarkable progress in the computed tomography (CT), ultrasonic diagnostic equipment and equipment for radio isotope diagnosis. Further, there has been developed a
5 concept "comprehensive diagnostic imaging (or integrated image diagnosis)" of connecting various diagnostic equipment with a computer and integrally diagnosing the images of different modalities.

However, the image on the X-ray image is basically
10 an analog image and cannot be satisfactorily incorporated in the integrated image diagnosis, thus retarding the computerization in the image diagnosis field, though it is most frequently utilized and considered most important in the image diagnosis.

Nevertheless, the X-ray image taking with a solid-
15 state image taking device is recently developed, and the image taking with the computerized digital X-ray image reading apparatus has gradually started in the X-ray image field. Such image taking method is featured
20 in that the image can be confirmed immediately after the image taking.

In such digital X-ray image taking, the blur in the taken image caused by the movement of the subject patient can be found immediately after the image taking
25 operation, so that there is frequently executed the image re-taking operation, which is not often executed in the conventional analog image taking. In such case,

regardless of the number of the image re-taking operations, the image finally outputted from the apparatus has to be arbitrarily selected among thus taken images.

5 Also the last taken image is not necessarily the best image in the final judgment, and there may be encountered a situation where, despite of the image re-taking, the image prior to the re-taking is better. It has therefore been desired to meet such requirements.

10

SUMMARY OF THE INVENTION

 In an embodiment of the present invention, there is provided an image processing apparatus comprising designation means for designating the image taking
15 conditions relating to the image taking, image taking means for taking an image under the image taking conditions designated by the designation means, storage means for storing the image, taken by the image taking means, as an already taken image, discrimination means
20 for discriminating whether the storage means contains an already taken image taken under the same image taking condition, and output control means for effecting control in such a manner, in case the discrimination means identifies that an already taken
25 image taken under the same image taking condition is present, as to the later taken image as the re-taken image.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the configuration of an X-ray image collection apparatus;

Fig. 2 is a view showing the functional
5 configuration of the X-ray image collection apparatus;

Fig. 3 is a view showing an example of the image on a display portion 11 in an embodiment of the present invention;

Fig. 4 is a view showing the state of the display
10 portion 11 after image re-taking;

Fig. 5 is a view showing the functional configuration relating to the image re-taking operation of the X-ray image collection apparatus;

Fig. 6 is a view showing the attributes of a study
15 ID 63, a serial number 62 and an image number 63;

Fig. 7 is a view showing the conventional study attribute, serial attribute and image attribute;

Fig. 8 is a view showing an example of image management in an embodiment of the present invention;

20 Fig. 9 is a view showing an example of the mode 1;

Fig. 10 is a view showing an example of the mode 2;

Fig. 11 is a flow chart of an image re-taking process by a part setting button 309;

25 Fig. 12 is a flow chart of an image re-taking process in case an image-retaking is designated; and

Fig. 13 is a flow chart of an overview image

selection process.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

In the following there will be explained an X-ray
5 image taking apparatus.

Fig. 1 is a block diagram showing the
configuration of the X-ray image taking (sensing)
apparatus.

The X-ray image taking apparatus 1 receives the
10 ordering information from an external network 3. The
present embodiment has two modes, namely a mode of
automatically entering an image taking start procedure
simultaneously with the reception of the ordering
information and another mode of entering the image
15 taking start procedure with the received ordering
information through a user interface. These modes will
not be explained here since they will be explained
later with reference to Fig. 2.

At first the operator places a subject to be taken
20 between a solid-state image taking element 6 and an X-
ray tube 9. Then a part setting button, for setting
the part to be taken, assumes a state selected
according to the ordering information. Subsequently,
based on a solid-state image taking element drive
25 control signal, the system applies a voltage to the
solid-state image taking element thereby preparing the
solid-state image taking element for image input.

Also a grid operating speed parameter is adjusted. An exposure button 4 serves as a trigger for generating the X-ray. An exposure signal a generated by the exposure button 4 is entered into an image reading control portion 20 of the image collection apparatus 1. The image reading control portion 20, after confirming whether the solid-state image taking element 6 is in a state of forming an image upon receiving the X-ray by the state of a drive information signal, generates an exposure enabling signal. The exposure permission signal turns on an exposure enabling switch 10, thereby passing the exposure signal a as an exposure signal b. The switch employed for this purpose is called a second switch of the exposure button. The exposure signal b is transferred to an X-ray generation control portion 5.

As soon as the preparation for X-ray exposure is completed, such as a grid 8 starts movement and reaches an optimum speed, the X-ray generation control portion 5 generates an exposure signal c to generate X-ray from the X-ray tube 9. After the exposure, the transmitted X-ray is entered, through the grid 8 and a scintillator 7, as an image into the solid-state image taking element 6. This image is read and digitized in an A/D converter 10 and transferred to an image reading control portion 20.

The image reading control portion 20 is controlled

by a CPU 17, which is also connected, through a bus 21, to a RAM 13, a ROM 14, a LAN/IF 15, a DISK/IF 16, a control panel, a non-volatile storage device 19 and a user IF 18. The non-volatile storage device 19 in the present embodiment is composed of a hard disk. The user IF 18 is provided with a display 11 and a keyboard/mouse 12 for interfacing with the user. Naturally there may be employed a touch panel. The image transferred to the image reading control portion 20 is stored in the ROM 13 and is subjected to various processing to be explained later in the CPU.

Fig. 2 is a view showing the functional configuration of the X-ray image collection apparatus.

Order information from the ordering device 33 is received by an order reception portion 31. Upon reception of the order, the arrival of the order is informed to an image taking start instruction portion 30. In the present embodiment, the image taking start instruction portion 30 has two modes, namely a mode of automatically entering the image taking start procedure simultaneously with the reception and a mode of entering the image taking start procedure with the received ordering information through a user interface. In the latter mode the user interface portion 18 displays a list of the received order and there is provided an advantage that the order can be selected from such list. In such case, prior to the reception

of the order information, a request is given to the ordering device 33 for transmitting the list of orders.

In either case, when the image taking start procedure is started, the order is interpreted in the order reception portion 31 and the personal information of the order, such as the name and birth date of the subject to be inspected, is transferred from the order reception portion 31 to the user interface 18 together with the instruction for starting the image taking.

The user interface 18 displays the name of the subject whereby the subject to be inspected can be confirmed.

At the same time, the part information a 1st body part ordered for inspection is transferred from the order reception portion 31 to a part button selection portion 29 together with the instruction for starting the image taking. Thus the part button selection portion 29 enables a part button of the corresponding part for selection. Also the user interface 18 displays the image taking condition according to the ordered image taking information. As will be clarified in the following description, as soon as the image taking of the ordered 1st part is completed, the image taking procedure is started according to the part information of a 2nd body part.

Then the image taking condition is transferred from the order reception portion 31 to an image taking condition setting portion 26, together with the

instruction for starting the image taking. The image taking condition setting portion 26 sets the conditions of the X-ray tube, such as the tube voltage and the focus size, in the X-ray generator 5 according to the
5 ordered image taking condition.

Then the image taking condition is transferred from the order reception portion 31 to a drive instruction portion 27 together with the instruction for starting the image taking. The drive instruction
10 portion 27 applies a voltage to the solid-state image taking element 6 thereby shifting it to a driven state. The driven state is not an image taking state but a state in which the voltage required for image collection is not applied in order to extend the
15 service life of the solid-state image taking element 6. The driven state expires after 1 minute if the image taking procedure is not executed, and returns to a non-driven state.

Then the image taking condition is transferred
20 from the order reception portion 31 to a grid operation setting portion 28 together with the instruction for starting the image taking. The grid operation setting portion 28 determines the grid speed parameter, preset depending for example on the information of the body
25 part for which the image taking is to be executed. For example, the grid speed is lowered or elevated respectively for a part requiring a long exposure time

and a part requiring a short exposure time.

Then the image taking condition is transferred from the order reception portion 31 to an image taking condition storage portion 24, together with the
5 instruction for starting the image taking. In order to manage the history of the image taking information, the storage is made in the RAM and the hard disk of the system.

In the following there will be explained a case
10 where the tube setting is changed X-ray generator 5.

In the present embodiment, the operator can arbitrarily set, in the X-ray generator 5, a condition such as the tube voltage or the focus size different from the ordered image taking condition, according to
15 the health state of the subject. In such case, the X-ray image collection apparatus 1 accepts the change of the image taking condition from an image taking condition change receiving portion 22. The drive instruction portion, the grid operation setting portion
20 28 and the image taking condition storage portion 25 executes the above-described procedures again since the image taking condition is reset. Also the user interface 18 displayed the changed image taking condition.

25 In response to the depression of the exposure button 4, the X-ray tube 9 executes the exposure. The data flow in this procedure will not be explained since

it is already illustrated in Fig. 1, but a signal is sent to the X-ray image collection apparatus 1 to send an operation signal to the grid and the solid-state image taking element 6.

5 In response to the depression of the exposure button 4 by the operator, the X-ray is generated to execute the image taking. Thereafter, the image taking operation condition, such as the image taking time and the mAs value, is generated by the X-ray generator 5,
10 and is received by the image taking operation condition receiving portion 23 and transferred to an image taking operation condition storage portion 24. The storage is made in the RAM and the hard disk of the system in order to manage the history of the image taking
15 operation.

 When the image taking sequence is completed, a next image taking sequence is started to repeat the above-described procedures.

 When the inspection consisting of single or plural
20 image taking sequence is completed, the information in the image taking condition storage portion 24 and the image taking operation condition storage portion 25 is transmitted to an order reply portion 32, which informs the completion of the inspection according to a
25 communication protocol determined in advance with the ordering device 33. In this operation, there are transmitted the image taking condition and the image

taking operation condition under which the image taking was executed.

One of the features of the present embodiment lies in a fact that the X-ray generator 5 is provided for
5 setting the solid-state image taking element 6 in the driven state. Therefore, even if the image taking element is shifted to the non-driven state upon expiration of 1 minute, it can be reset to the driven state by an instruction for changing the parameter from
10 the X-ray generator 5. Therefore, the instruction for change is given from the X-ray generator 5 even if the parameter remains same before and after the change. This function allows the operator to execute the image taking operation even without looking at the display on
15 the X-ray image collection apparatus 1.

Fig. 3 shows an example of the display of a display portion 11 in the present embodiment.

At the image taking operation, the operator depresses an image taking start button 302 to request
20 that the ordering device 33 transmits the order list, whereby the received order list is displayed to enable selection an order therefrom. In case the transmission of the order list is not requested, and if the order is transmitted from the ordering device 33 to the X-ray
25 image collection apparatus 1, the image taking start procedure is initiated according to the received ordering information. When the image taking procedure

is started, a "chest PA" button 310 indicating the initial image taking part is rendered selectable as illustrated. Also as the image taking condition, there is displayed a tube voltage of 125 kV is displayed.

5 This value can be changed in the X-ray generator 5, and is changed on real-time basis according to the change in the X-ray generator 5. The image taking operation is thereafter executed, and the image taking operation condition of 30 mAs is displayed on the user interface.

10 When all the image taking operations are executed, the inspection is terminated either by the depression of an inspection end button 311 or automatically by time-out. Upon completion of the inspection, the image taking information and the image taking operation information are returned to the ordering device 33 as explained in
15 the foregoing. Also the collected images are externally transferred through the network.

In the foregoing there has been explained the method collecting the images according to the ordering
20 information, by image taking operation in succession on the designated parts under pre-designated conditions, but the image taking may not be successful in one operation, mostly because of the movement of the subject. The movement of the subject causes a blur in
25 the obtained image, eventually causing a difficulty in the diagnosis.

However, in case of image taking again, the re-

taking is not required for all the images collected prior to the re-taking according to the order from the HIS (hospital information system) but is often required for a body part under the designated condition. This invention is to meet such requirement.

Fig. 4 is a view showing the state of the display portion 11 after image re-taking.

In case the image re-taking becomes necessary because of an image blur at the image taking of the head portion, an image re-taking button 306 is depressed, whereby there is reached a state ready for image re-taking. In such case, there is usually used the same image taking condition, but the image taking condition may also be changed if the operator judges that the image taking cannot be properly executed under the same image taking condition, for example because of the body size of the subject.

Then the exposure button 4 is depressed to execute the image re-taking, whereupon the re-taken image is displayed as illustrated. The previous image, which is now regarded as an already collected image because of the image re-taking, is to be replaced by the re-taken image in the default condition, and is therefore displayed with a cross mark thereon. Fig. 5 shows a case where the image re-taking is executed twice.

The operator may execute the image re-taking plural times, but the image transferred externally as

the ordered image is not necessarily the one taken last. When the already collected image 1 in Fig. 4 is selected with the mouse, such image becomes the representative image and the cross mark is removed from such image while the last taken image is displayed with a cross mark. In this manner the selected image alone becomes the image constituting the result of the order while other images are regarded as failure.

Also the taken images are stored in the non-volatile storage device shown in Fig. 1 even after the image re-taking, and can be read and transferred in case there is required an image other than the image constituting the result of the order.

Fig. 5 is a view showing the functional configuration relating to the image re-taking process of the X-ray image collection apparatus.

When the operator depresses the image re-taking button 306 for executing the image re-taking, a notice is given to a user input/output portion 51 and further from an image re-taking portion 52 to an image taking/system control portion 56 controlling the image taking operation. The image taking/system control portion 56 prepares for the image taking, and the image taking operation is executed when the operator depressed the exposure button (not shown in Fig. 5).

Subsequently the taken image is transferred through an image addition portion 54 to a display

portion 53, which thus displays the image on the display through the user input/output portion 51. (Image addition means adding an image to an overview list.)

5 When the user re-selects, on the user input/output portion 41, the representative image from the images obtained by image re-taking, a notice is given to a collection image re-selection portion 55 and further to the display portion 53 and the image taking/system control portion 56. The display portion 53 executes erasure and setting of the cross marks, while the image taking/system control portion 56 maintains the representative image, and transfers the representative image only to the network when the inspection is
10 terminated.
15

 In the following there will be explained the image re-taking process, with reference to flow charts shown in Figs. 11 to 13.

 Fig. 11 is a flow chart of the image re-taking process by the actuation of the part setting button
20 300.

 A step S1101 discriminates whether the part setting button 300 has been depressed, and, if depressed, the sequence proceeds to a step S1102. The
25 step S1102 discriminates whether an image with the same unique ID is present in the already taken images, namely the already collected images, and the sequence

proceeds to a step S1103 or S1107 respectively such
image is present or absent. The unique ID is
information for specifying the image taking information
such as the subject name, body part to be taken, image
5 taking direction, image taking condition etc.

A step S1103 enters a stand-by state for executing
the image taking operation, and, when the image taking
operation is executed, the sequence proceeds to a step
S1104. Also a step S1107 enters a stand-by state for
10 executing the image taking operation, and, when the
image taking operation is executed, the sequence
proceeds to a step S1105.

A step S1104 attaches cross marks on all the
images of the same unique ID in the already collected
15 images. In this state, the already collected images 1,
2 are displayed with the cross marks, as shown in Fig.
4. Then a step S1105 sets, on the last taken image,
namely the re-taken image 403 in Fig. 4, a unique IID
same as that of the already collected images 1, 2.
20 Then a step S1106 displays the re-taken image in an
overview 305 whereupon the image re-taking process is
terminated.

In the following there will be explained, with
reference to Fig. 12, the image re-taking process when
25 the image re-taking is instructed.

The sequence of Fig. 12 is initiated when the
image re-taking is instructed for example by the image

re-taking button 306. A step S1201 enters a state for waiting for a re-taking object image to be re-taken, and, when the re-taking object image is displayed on the display portion 11, the sequence proceeds to a step
5 S1202. A step S1202 discriminates whether the re-taking object image is designated among the object images displayed in the step S1201, and, if designated, the sequence proceeds to a step S1203. A step S1203 attaches a cross mark to the designated re-taking
10 object image, namely the already collected image. This state is illustrated in Fig. 4.

Then a step S1204 enters a stand-by state for executing the image re-taking operation. When the image re-taking operation is executed, the sequence
15 proceeds to a step S1205. A step S1205 sets a same unique ID to the already collected image and the re-taken image. The unique ID is same as that explained in relation to Fig. 11 and will not be explained further. Then a step S1206 displays the re-taken image
20 on the overview 305, whereupon the image re-taking process is terminated.

Fig. 13 is a flow chart of a process for selecting the overview images, which is to be executed after the image re-taking process according to Figs. 11 and 12,
25 as will be explained in the following.

A step S1301 discriminates whether any of the overview images 305 as shown in Fig. 4. If selected, a

step S1302 discriminates whether a cross mark is present on the selected overview image, and, if present or absent, the sequence respective proceeds to a step S1303 or S1305. A step S1303 displays the selected
5 overview image by detaching the cross mark. A step S1304 searches an image of a unique ID same as that of the overview image from which the cross mark is detached in the step S1303, and attaches a cross mark to the overview image of the same ID. It is thus
10 rendered possible to select only one image without the cross mark among the overview images of a same ID and to transfer the one selected image only to the exterior. In the present embodiment, there is selected only one image, but it is naturally possible also to
15 select and transfer plural images.

A step S1302 identifies that the selected overview image does not bear the cross mark, the sequence proceeds to a step S1305 for attaching a cross mark on the selected overview image.

20 As explained in the foregoing with reference to Fig. 13, an image suitable for inspection can be selected from a group of images obtained by image re-taking and transferred to the exterior, so that the image re-taking can be executed relatively easily.
25 Also this configuration can flexibly adapt to a situation where the already taken image is found, after the image re-taking, better than the re-taken image.

There is already defined a standard communication protocol called DICOM, which manages the taken images by handling a plurality of taken images as a series, also handling a plurality of the series as a study, and
5 executing the image taking operation in succession in the unit of such study.

Fig. 6 shows the attributes of a study ID 63, a series number 62 and an image number 63.

Since this protocol is applicable to the
10 inspection of any modality, and is therefore dependent on the condition of preparation of a new series and the condition of image taking condition of the modality. In the digital image collection apparatus of the present embodiment, each image is generally managed as
15 a series.

Fig. 7 shows the relationship of the study attribute, series attribute and image attribute in the conventional digital image collection apparatus.

In case a new series is added where a series 1 is
20 already present, there is generated a new series with an assigned series number 2 even if the serial attribute is same, and is attached to a study 1234. In this method, a series is newly assigned when an image is formed in any of all the taken images.

25 In certain image taking methods, plural images may be taken from a same direction, such as in II-DR still image taking. In such case, there are generated plural

images with a same series attribute, so that the serially taken images can be added while fixing the study and the series. The present embodiment can dynamically adapt to such case.

5 In the following there will be given further explanation with reference to Fig. 8.

Fig. 8 is a view showing an example of image management in the present embodiment.

At first the image taking operation is executed in
10 a study of an attribute different from that of the past study, there is generated a new study. There is illustrated the generation of a study with the study attribute 5678. The initial image in this study constitutes a new series and a new image, so that a
15 series with the series number 1 is added to the study and a taken image with the image number 1 is added to the series of the series number 1. In Fig. 8, alphabets AAAA, OOOO etc. schematically indicate various attributes.

20 If a next image taking is executed with the same series attribute, namely with the same image taking protocol, inspected part and viewing direction, the taken image is added with an image number 2 to the series 1.

25 Then, if a next image taking is executed with at least a different series attribute, namely if any of the image taking protocol, inspected part and viewing

direction is made different, a series 2 is newly generated and added to the study of the study number 5678, and the taken image is added as a new image of an image number 1 to the series 2.

5 The present embodiment is also featured by a fact that the operation can be varied by two modes, in case the image taking is again executed with the attribute of the series 1 after the above-mentioned 3 image takings.

10 Fig. 9 shows an example of the mode 1.

 This mode searches a past series of the same series attribute, and, if such series is present, adds the taken image to such searched series. In the illustrated example, the taken image is added with an image number 3 to the series of the series number 1.

15 Fig. 10 shows an example of the mode 2.

 This mode does not search the past series of the same series attribute, but generates a new series and adds the taken image thereto. In the illustrated example, the taken image is added with an image number 1 in a new series generated with a series number 3.

20 Such process is advantageous in the image management, since the serial images of similar attributes can be collectively managed.

25 In the foregoing embodiment, there has been explained a case of storing the programs in the ROM, but such configuration is not restrictive and there may

be employed any arbitrary storage medium. Also there may be adopted a circuit capable of similar functions.

The present invention may be applied to a system consisting of plural equipment or an apparatus consisting of a single equipment. Also the present invention includes a case where a storage medium recording the program codes of a software realizing the functions of the aforementioned embodiments is supplied to a system or an apparatus and the functions of the
10 aforementioned embodiments are realized by reading and executing the program codes stored in the storage medium by a computer (CPU or MPU) of the above-mentioned system or apparatus. In such case the program codes themselves read from the storage medium
15 realize the functions of the aforementioned embodiments, and the storage medium storing the program codes constitutes the present invention.

The storage medium storing such program codes can be, for example, a floppy disk, a hard disk, an optical
20 disk, a magnetooptical disk, a CD-ROM, a CD-R, a magnetic tape, a non-volatile memory card or a ROM.

The present invention also includes such program codes not only in a case where the functions of the aforementioned embodiments are realized by the
25 execution of the read program codes by the computer but also a case where an operating system or the like functioning on the computer executes all or a part of

the actual processes under the control of such program codes thereby realizing the functions of the aforementioned embodiments.

5 The present invention further includes a case wherein the program codes read from the memory medium are once stored in a memory provided in a function expansion board inserted into the computer or a function expansion unit connected to the computer, and a CPU provided in the function expansion board or the
10 function expansion unit executes all the process or a part thereof according to the instructions of such program codes, thereby realizing the functions of the aforementioned embodiments.

15 As explained in the foregoing, the present invention allows to arbitrarily select the image adapted for inspection from the group of images obtained by image taking.

WHAT IS CLAIMED IS:

1. An image processing apparatus comprising:

designation means for designating an image taking condition relating to image taking;

5 image taking means for taking an image under the image taking condition designated by said designation means;

storage means for storing the image taken by said image taking means as an already taken image;

10 discrimination means adapted, in case the image taking condition is designated by said designation means, to discriminate whether an already taken image taken under the same image taking condition is present in said storage means; and

15 output control means adapted, in case said discrimination means identifies that the already taken image of the same image taking condition is present, to output an image taken later as a re-taken image.

20 2. An image processing apparatus according to claim 1, further comprising storage control means for storing the taken images of a same image taking condition with a same attribute information.

25 3. An image processing apparatus according to claim 2, wherein said output control means is adapted, in outputting the images of a same attribute

information, to attach identification information to the already taken image.

4. An image processing apparatus according to
5 claim 3, further comprising selection means for selecting an arbitrary image;

wherein, in case a taken image bearing the identification information is selected by said selection means, the identification information
10 attached to said selected taken image is erased, and, in case a taken image not bearing the identification information is selected by said selection means, said selected taken image is outputted with the identification information.

15

5. An image processing apparatus according to claim 4, wherein, in case of external transfer of the taken image, a taken image not bearing said identification information is externally transferred.

20

6. An image processing apparatus according to claim 2, wherein, in case of external transfer of the taken image, taken images of a same attribute information are collectively transferred.

25

7. An image processing apparatus according to claim 1, wherein said image taking condition includes

at least one of the name of an inspected person, image taking body part, image taking direction and image taking condition.

5

~~8.~~ An image processing apparatus comprising:
image taking means for taking an image;
output means for outputting an already taken
image, taken by said image taking means;

10

selection means for selecting an arbitrary image
from the already taken images outputted to said output
means;

re-taking instruction means for instructing re-
taking of an image; and

15

output control means adapted, in case the image
re-taking is instructed by said re-taking instruction
means, to output an already taken image selected by
said selection means and a re-taken image which is
instructed by said image re-taking instruction means,
in mutually identifiable manner.

20

9. An image processing apparatus according to
claim 8, further comprising image re-taking means for
executing image re-taking according to the instruction
of said re-taking instruction means.

25

10. An image processing apparatus according to
claim 7, further comprising attachment means for

attaching, to said re-taken image, attribute information same as that of the already taken image selected by said selection means.

5 11. An image processing apparatus according to claim 10, wherein said output control means is adapted, in outputting an image to which the same attribute is attached by said attachment means, to output the already taken image with identification information,
10 and, in case an already taken image is selected by said selection means, the identification information attached to said selected already taken image is erased, while, in case a re-taken image is selected by said selection means, said re-taken image is outputted
15 with the identification information attached thereto.

 12. An image processing apparatus according to claim 9, wherein, in case of external transfer of the taken image, an image not bearing said identification
20 information is externally transferred.

 13. An image processing apparatus according to claim 10, wherein, in case of external transfer of the taken image, images bearing same attribute information
25 are collectively transferred.

~~14.~~ An image processing method comprising:

a designation step of designating an image taking condition relating to image taking;

an image taking step of taking an image under the image taking condition designated by said designation
5 step;

a storage step of storing the image taken by said image taking step as an already taken image;

a discrimination step adapted, in case the image taking condition is designated by said designation
10 step, to discriminate whether an already taken image taken under the same image taking condition is present in said storage step; and

an output control step adapted, in case said discrimination step identifies that the already taken
15 image of the same image taking condition is present, to output an image taken later as a re-taken image.

15. An image processing method according to claim 14, further comprising a storage control step of
20 storing the taken images of a same image taking condition with a same attribute information.

16. An image processing method according to claim 15, wherein said output control step is adapted, in
25 outputting the images of a same attribute information, to attach identification information to the already taken image.

17. An image processing method according to claim 16, further comprising a selection step of selecting an arbitrary image;

5 wherein, in case a taken image bearing the identification information is selected by said selection step, the identification information attached to said selected taken image is erased, and, in case a taken image not bearing the identification information is selected by said selection step, said selected taken
10 image is outputted with the identification information.

18. An image processing method according to claim 17, wherein, in case of external transfer of the taken image, a taken image not bearing said identification
15 information is externally transferred.

19. An image processing method according to claim 15, wherein, in case of external transfer of the taken image, taken images of a same attribute information are
20 collectively transferred.

20. An image processing method according to claim 14, wherein said image taking condition includes at least one of the name of an inspected person, image
25 taking body part, image taking direction and image taking condition.

21. An image processing method comprising:

an image taking step of taking an image.

an output step of outputting an already taken image, taken by said image taking step;

5 a selection step of selecting an arbitrary image from the already taken images outputted by said output step;

a re-taking instruction step of instructing re-taking of an image; and

10 an output control step adapted, in case the image re-taking is instructed by said re-taking instruction step, to output an already taken image selected by said selection step and a re-taken image which is instructed by said image re-taking instruction step, in mutually
15 identifiable manner.

22. An image processing method according to claim 21, further comprising an image re-taking step of executing image re-taking according to the instruction
20 of said re-taking instruction step.

23. An image processing method according to claim 21, further comprising an attachment step of attaching, to said re-taken image, attribute information same as
25 that of the already taken image selected by said selection step.

24. An image processing method according to claim 23, wherein said output control step is adapted, in outputting an image to which the same attribute is attached by said attachment step, to output the already
5 taken image with identification information, and, in case an already taken image is selected by said selection step, the identification information attached to said selected already taken image is erased, while in case a re-taken image is selected by said selection
10 step, said re-taken image is outputted with the identification information attached thereto.

25. An image processing method according to claim 22, wherein, in case of external transfer of the taken
15 image, an image not bearing said identification information is externally transferred.

26. An image processing method according to claim 23, wherein, in case of external transfer of the taken
20 image, images bearing same attribute information are collectively transferred.

~~27.~~ A storage medium storing program codes comprising:
25 a designation step of designating an image taking condition relating to image taking;
an image taking step of taking an image under the

image taking condition designated by said designation step;

a storage step of storing the image taken by said image taking step as an already taken image;

5 a discrimination step adapted, in case the image taking condition is designated by said designation step, to discriminate whether an already taken image taken under the same image taking condition is present in said storage step; and

10 an output control step adapted, in case said discrimination step identifies that the already taken image of the same image taking condition is present, to output an image taken later as a re-taken image.

15 ~~28.~~ A storage medium storing program codes comprising:

an image taking step of taking an image;

an output step of outputting an already taken image, taken by said image taking step;

20 a selection step of selecting an arbitrary image from the already taken images outputted by said output step;

a re-taking instruction step of instructing re-taking of an image; and

25 an output control step adapted, in case the image re-taking is instructed by said re-taking instruction step, to output an already taken image selected by said

selection step and a re-taken image which is instructed by said image re-taking instruction step, in mutually identifiable manner.

ABSTRACT OF THE DISCLOSURE

Among a group of taken images, an image suitable for inspection is identifiably displayed and such image can be arbitrarily selected.

- 5 Also an image re-taken by the instruction of a re-taking instruction portion is additionally display on a display portion by an image addition portion, and images already taken prior to the re-taking are displayed with a character or a symbol such as a cross
- 10 mark for easy identification by the operator. Also there is provided a collected image re-selecting portion for arbitrarily selecting an image from the re-taken image and the already taken image.

FIG. 1

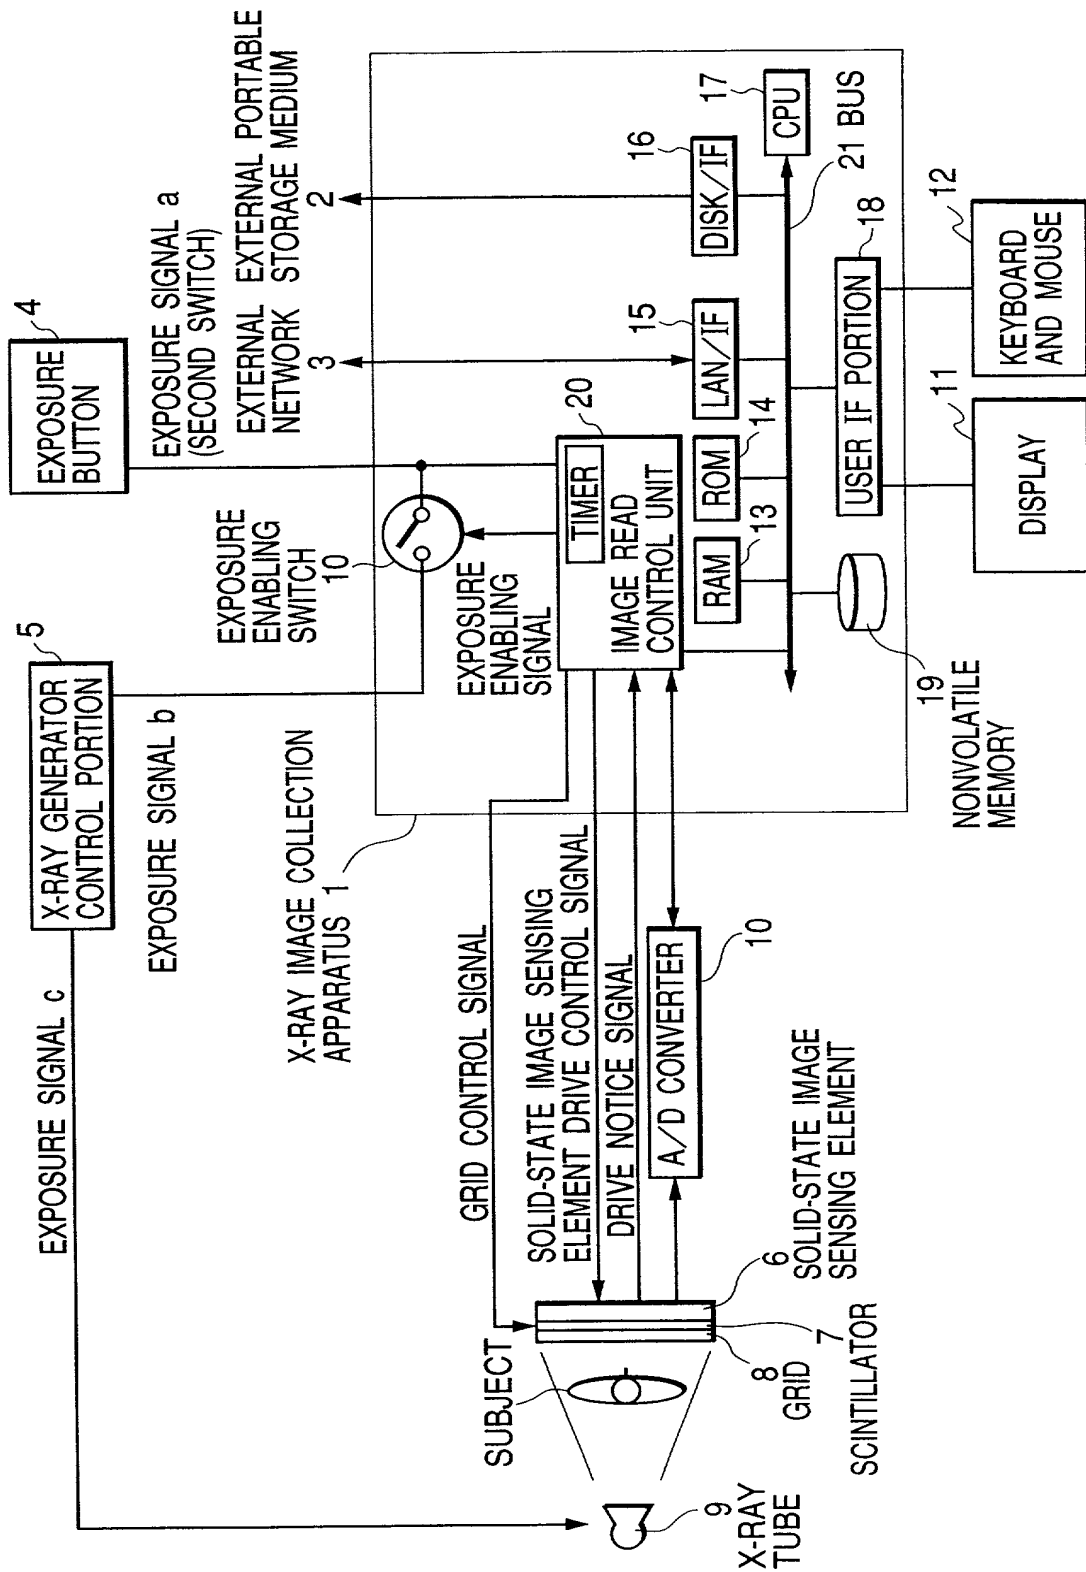
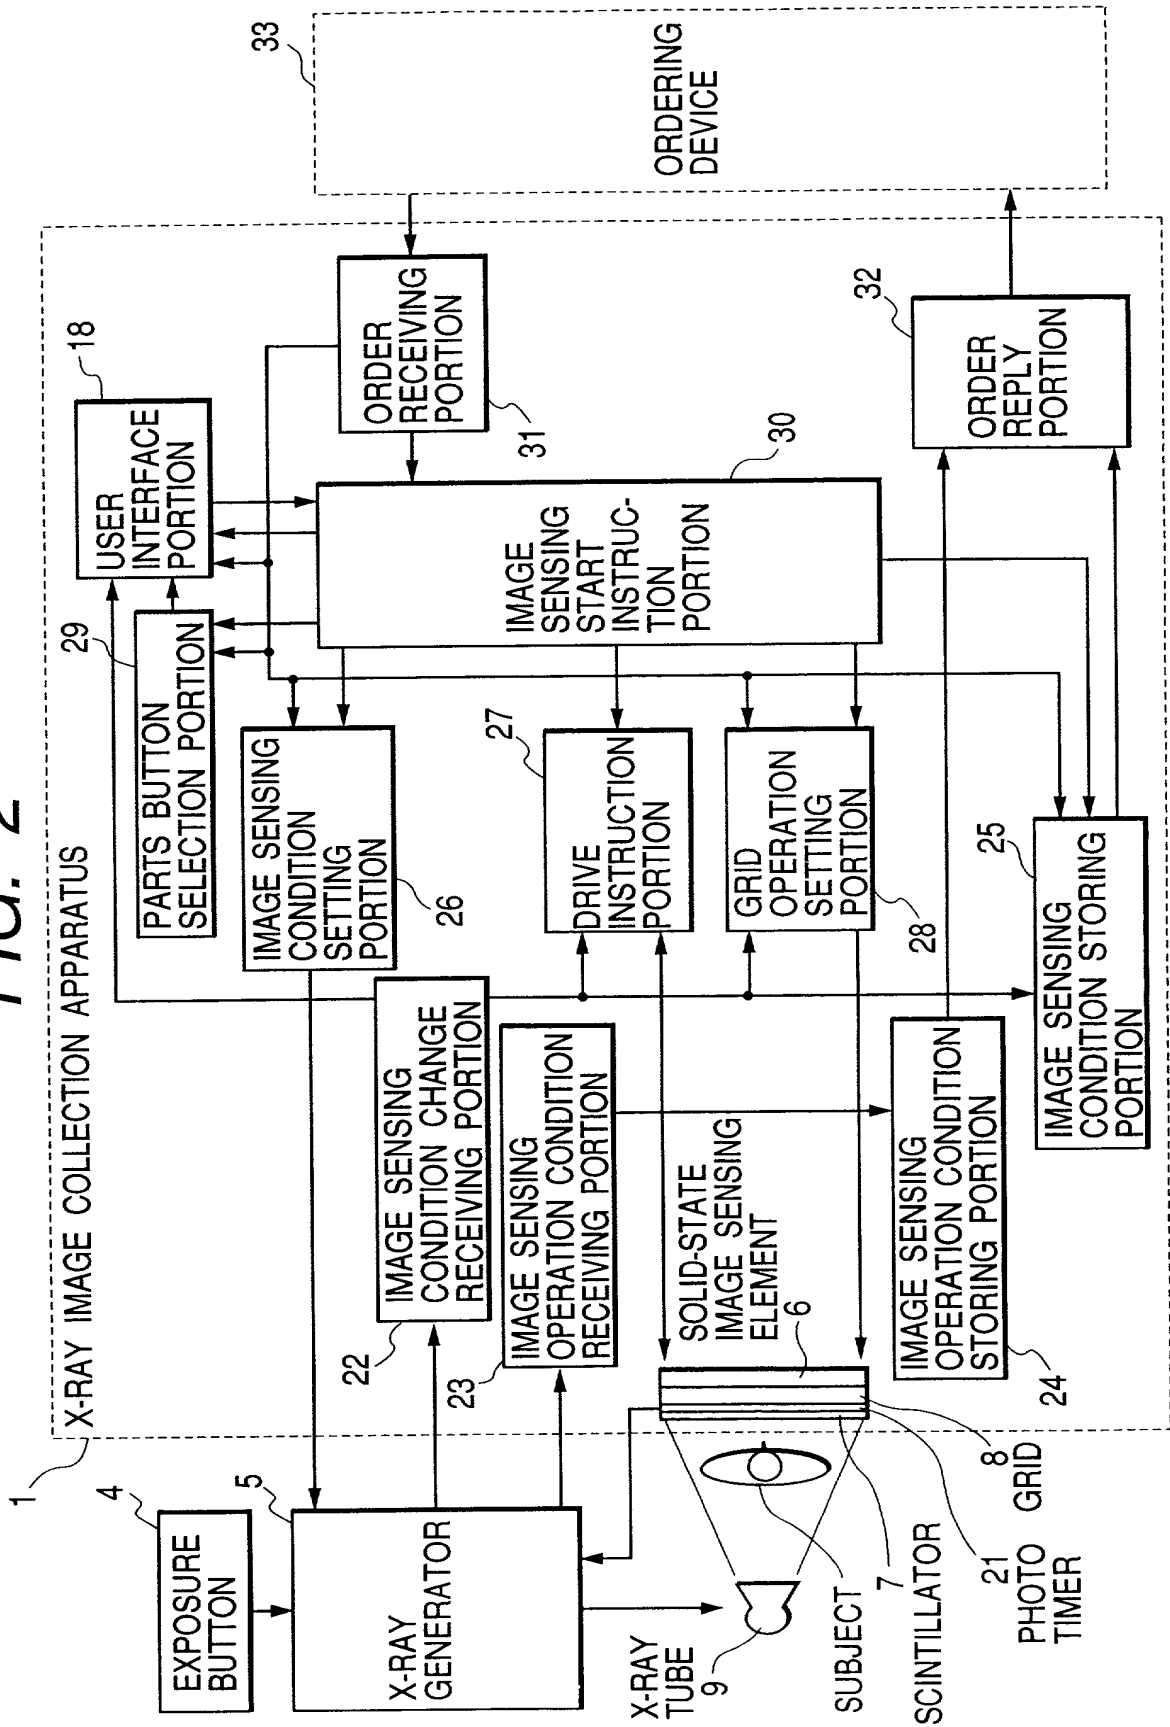


FIG. 2



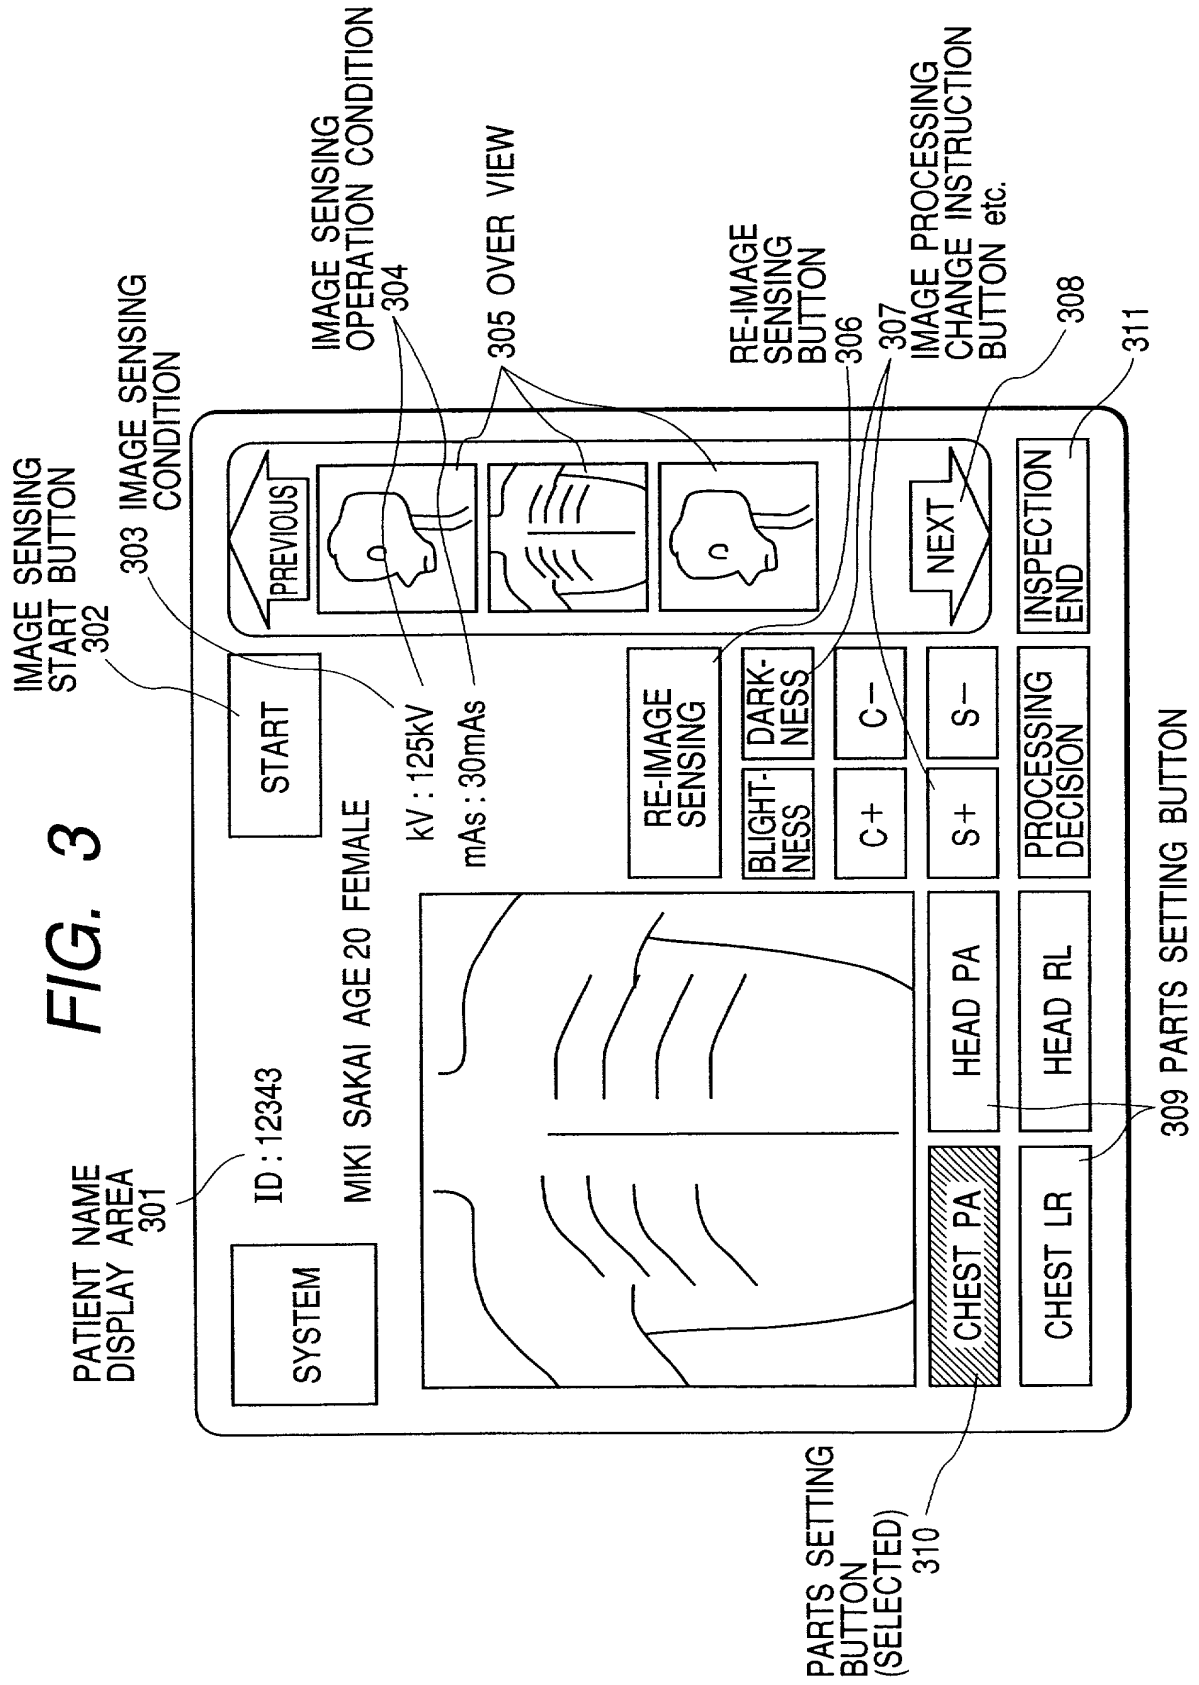


FIG. 4

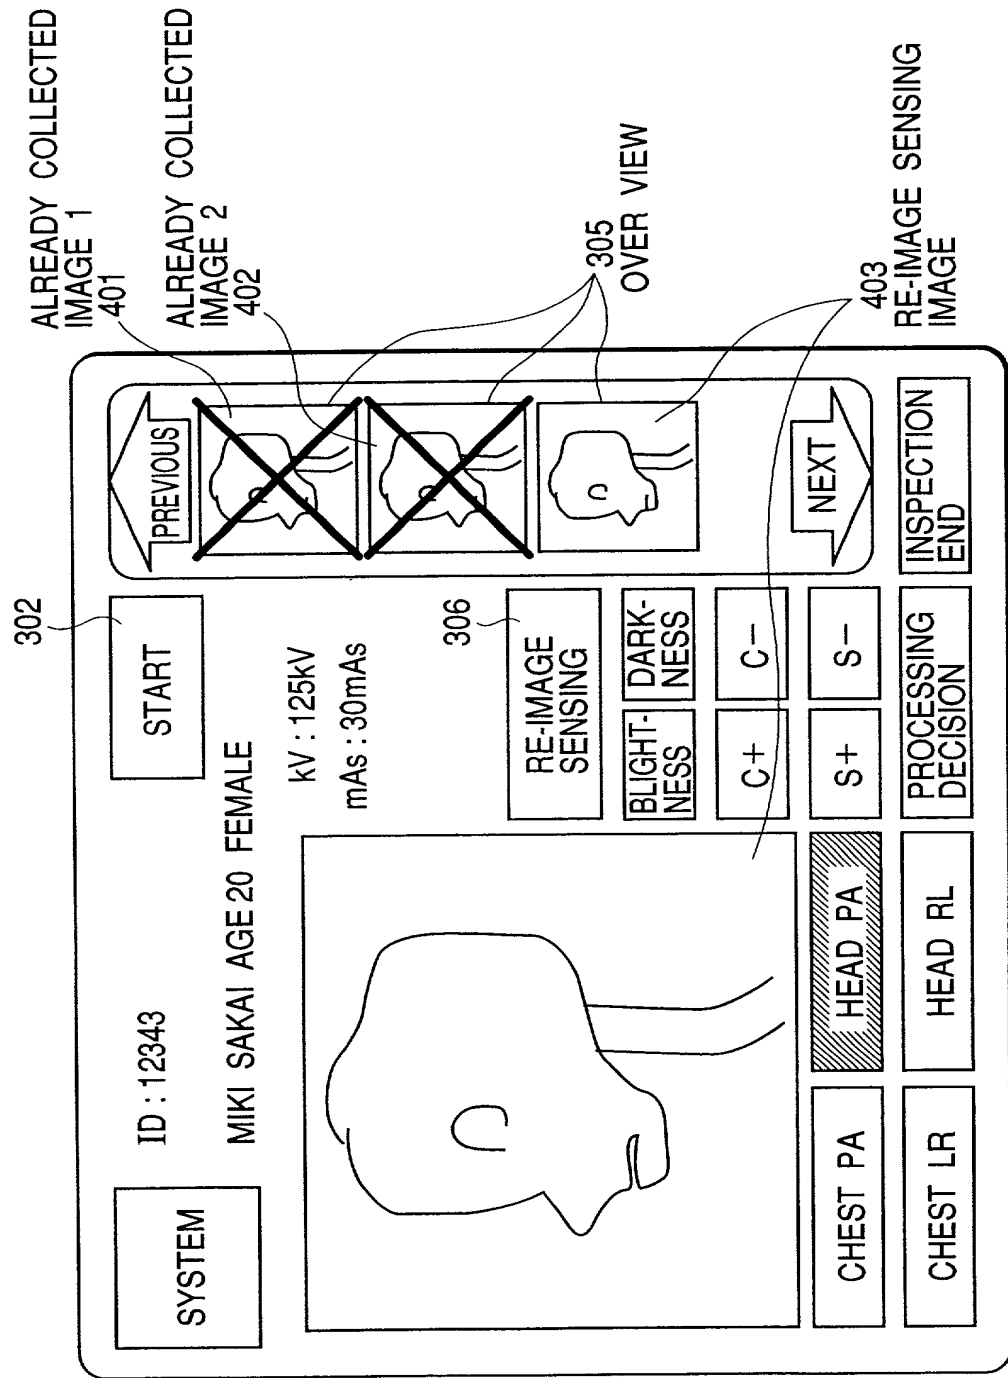


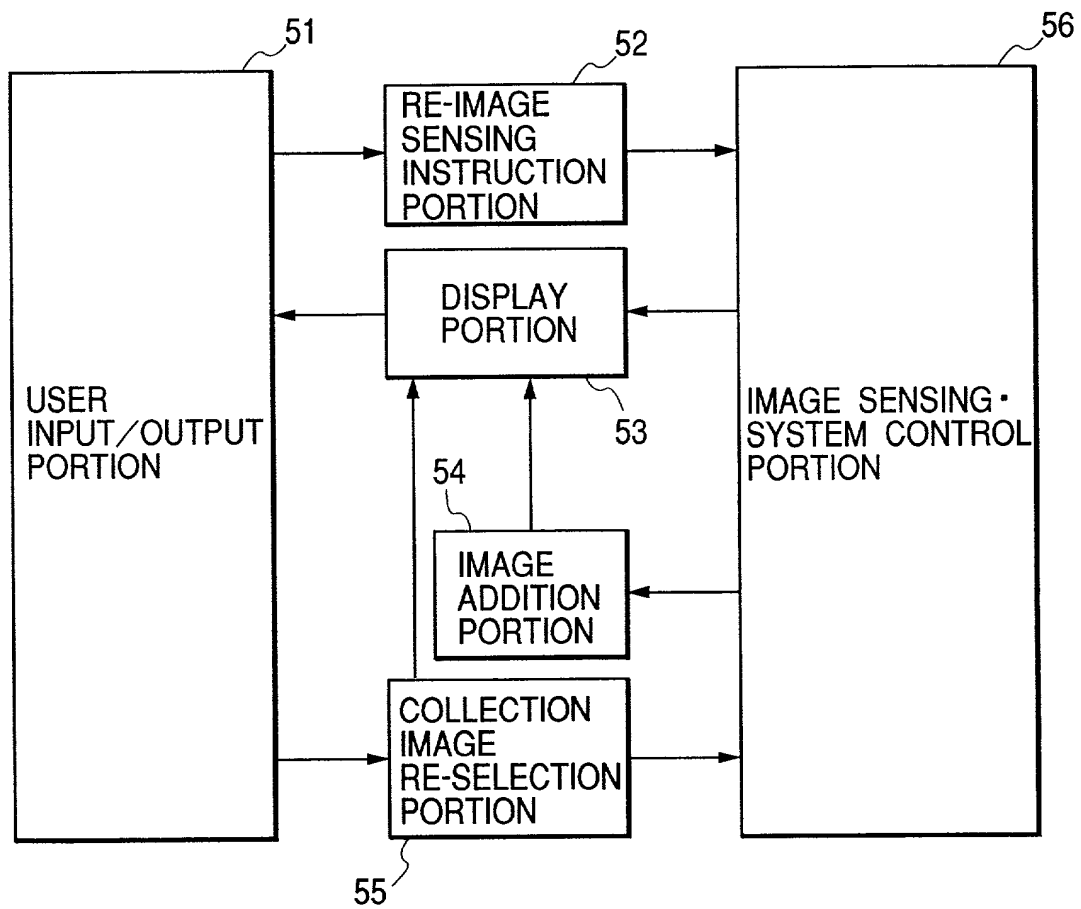
FIG. 5

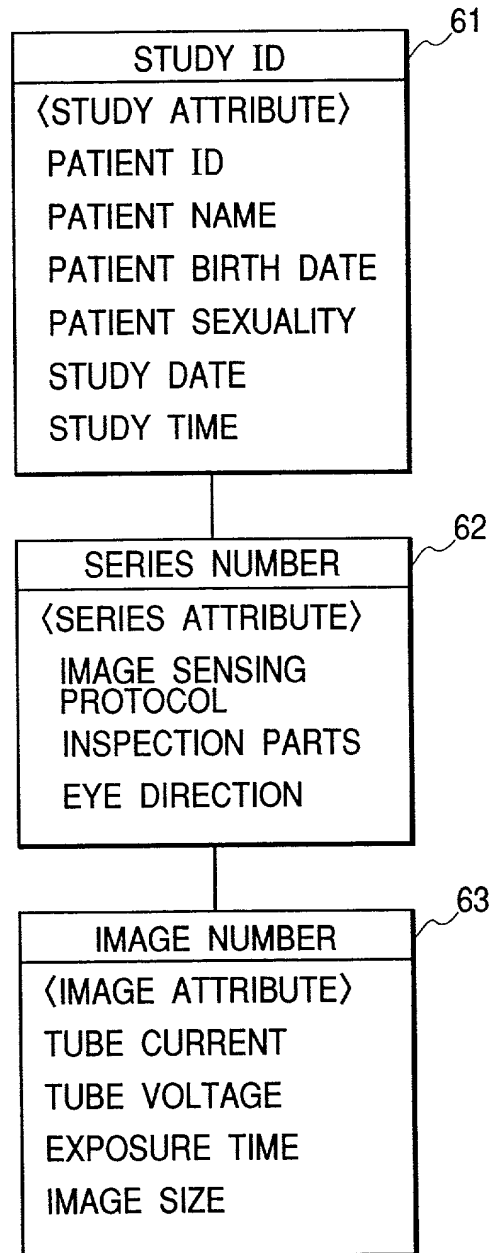
FIG. 6

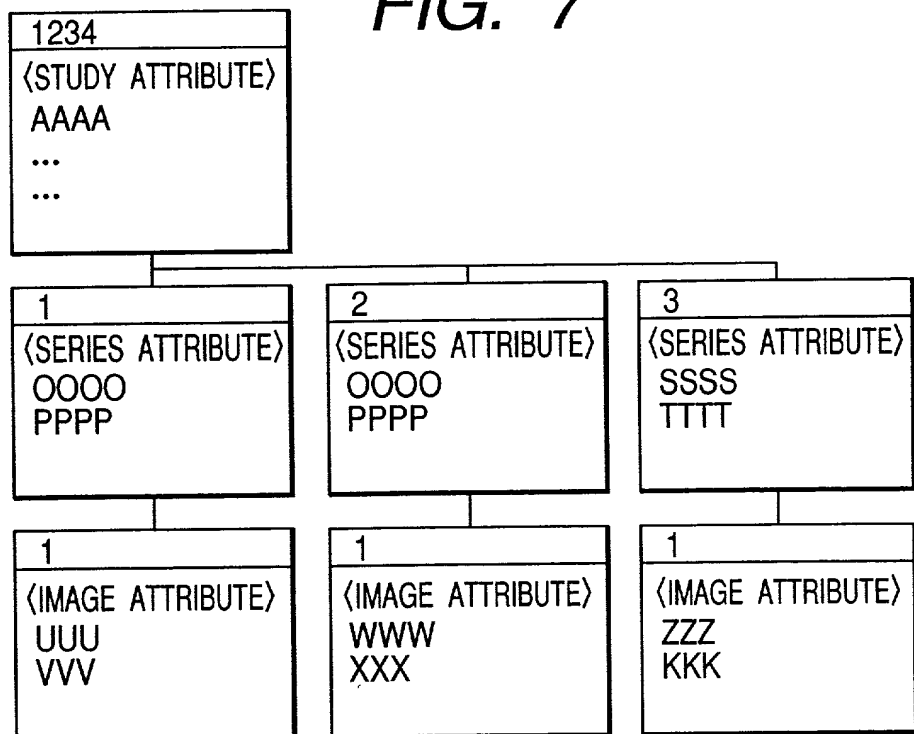
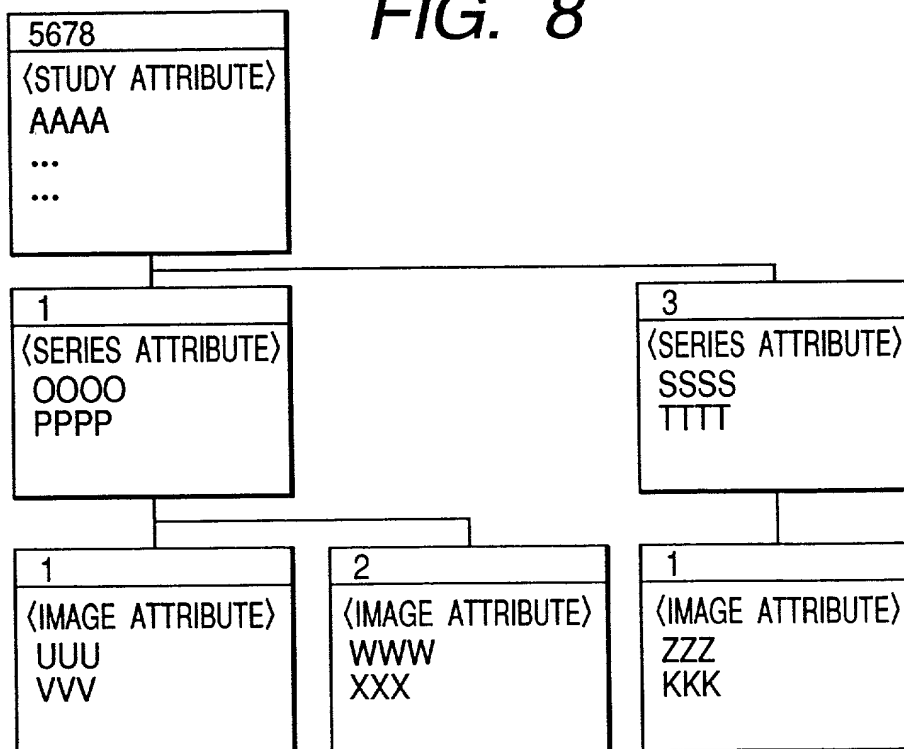
FIG. 7**FIG. 8**

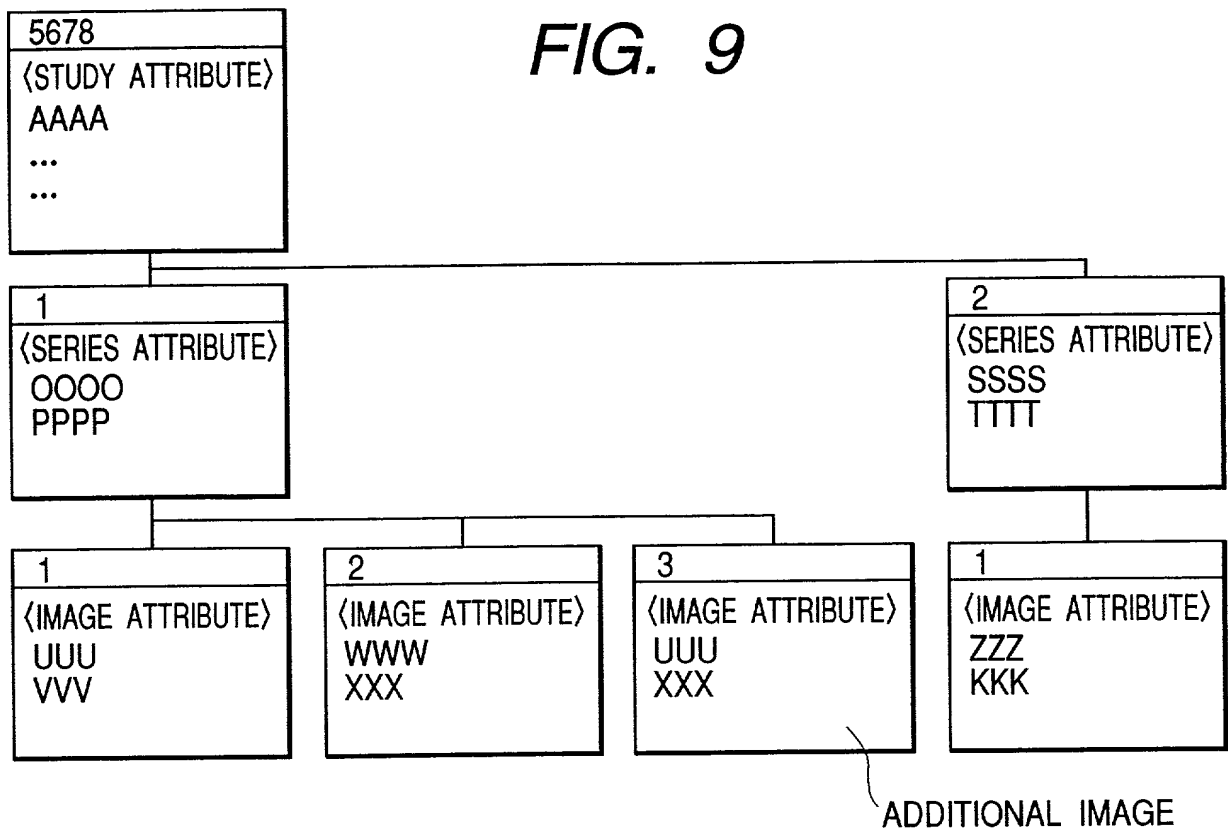
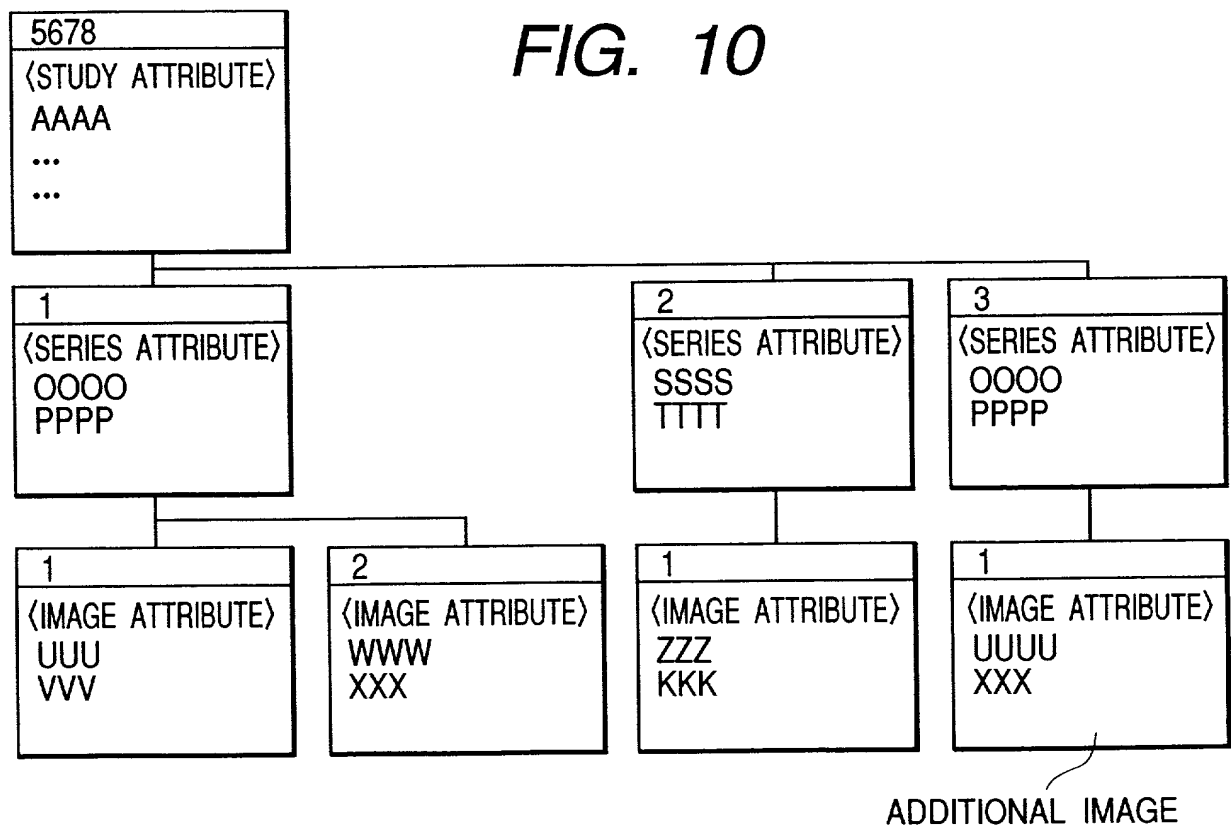
FIG. 9*FIG. 10*

FIG. 11

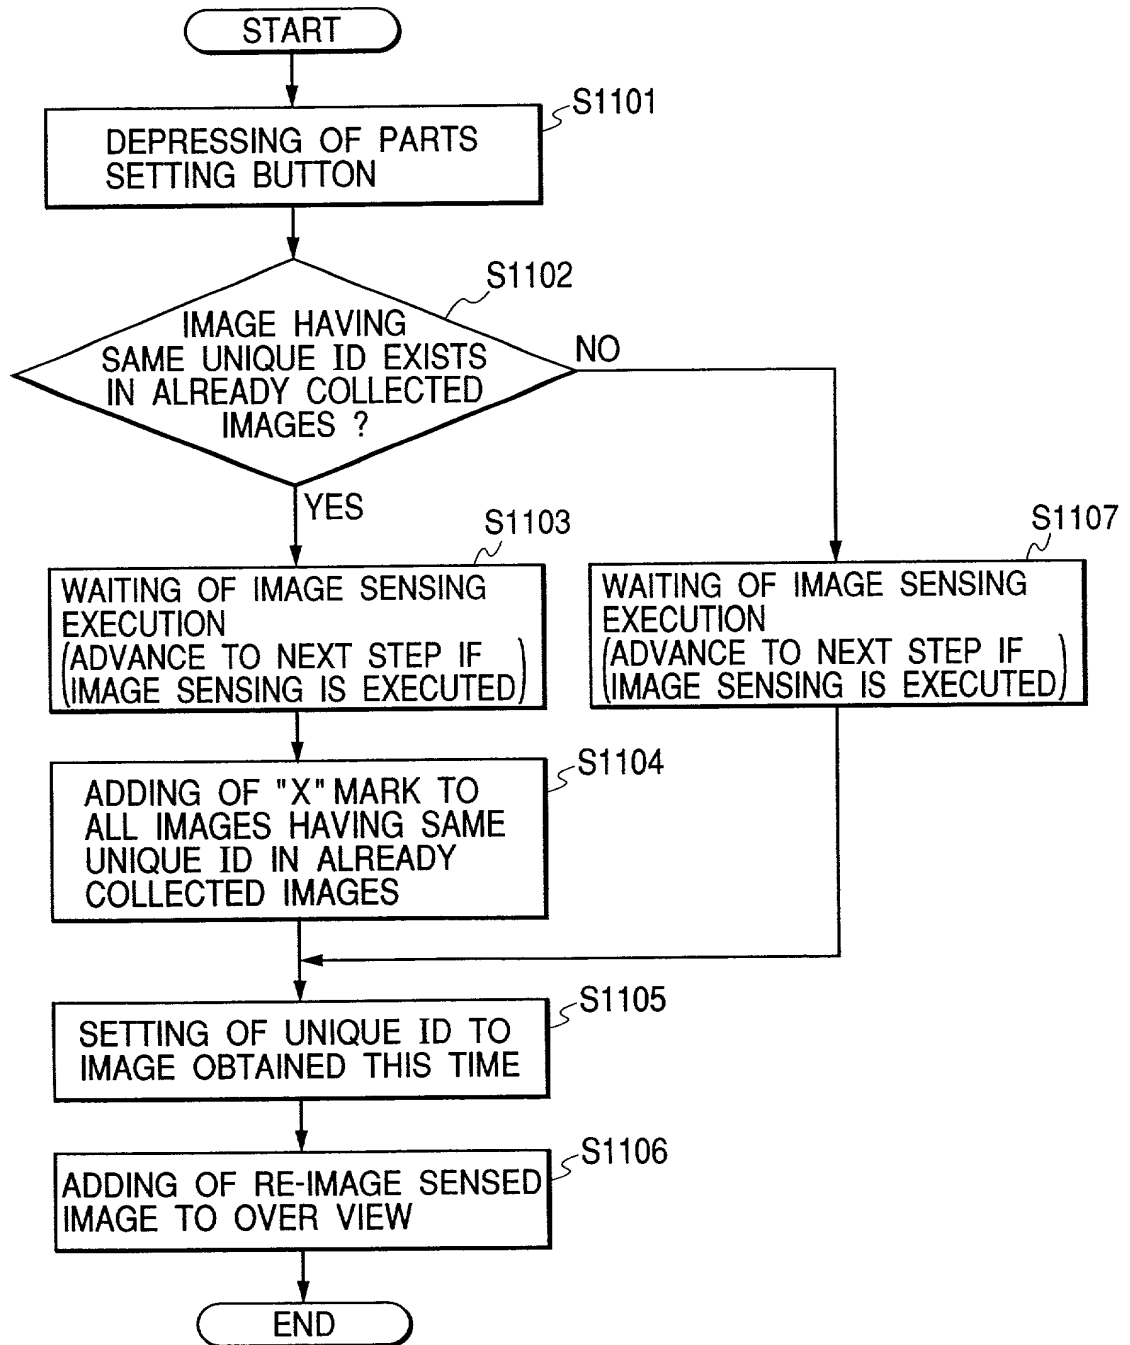


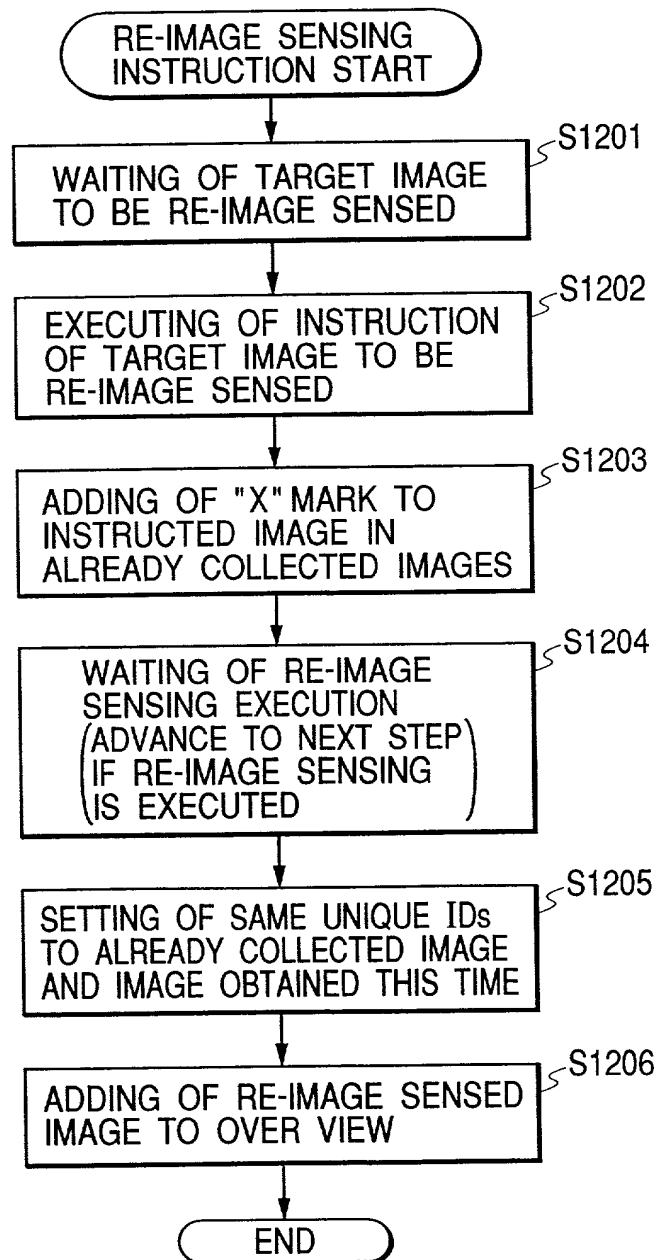
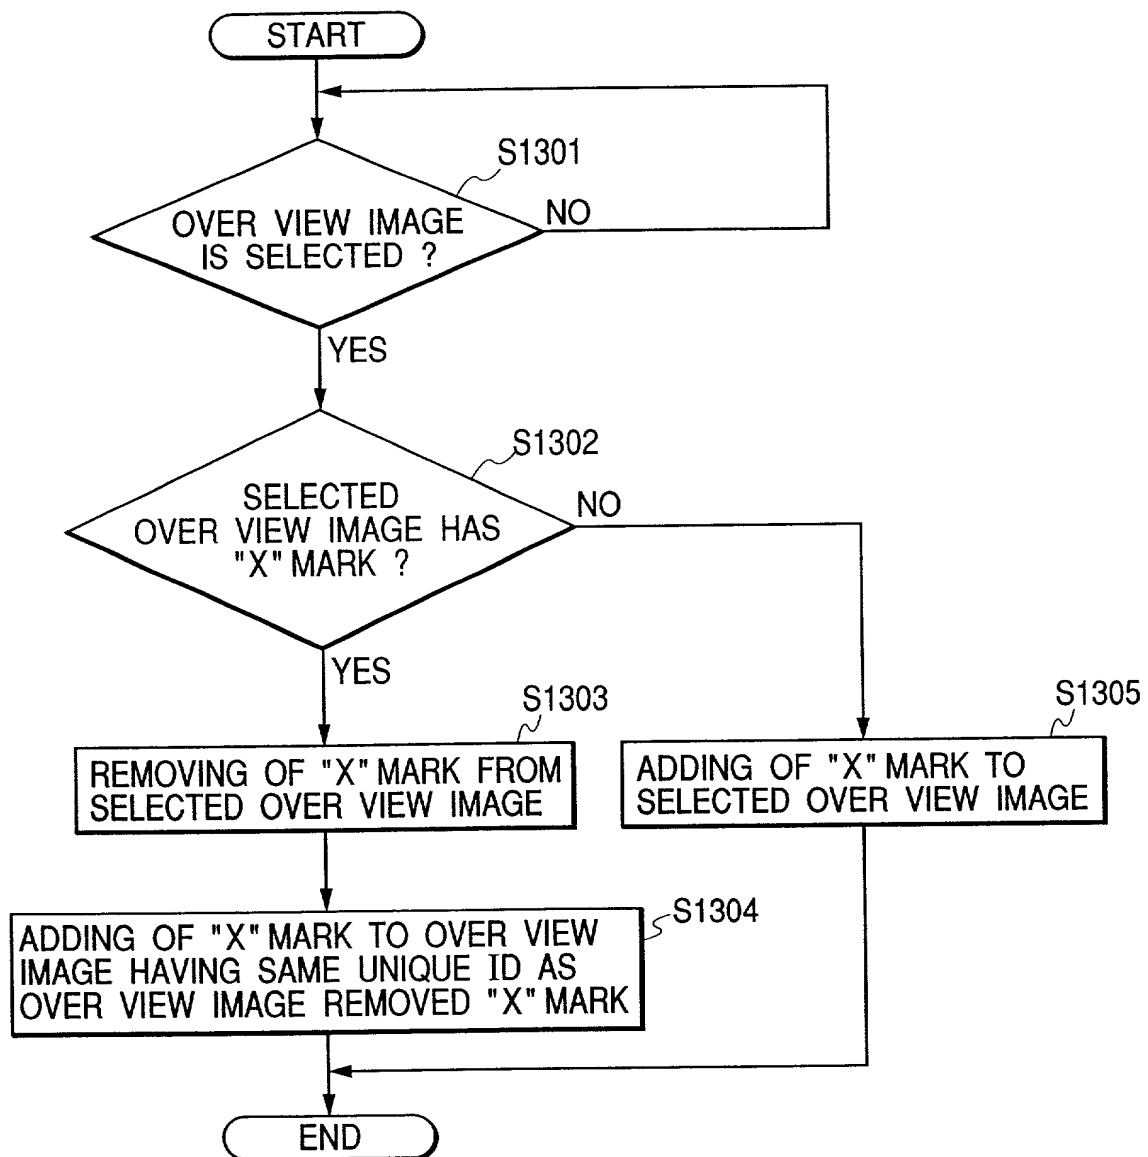
FIG. 12

FIG. 13

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION

(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

IMAGE PROCESSING APPARATUS, METHOD AND STORAGE MEDIUM THEREFOR

the specification of which ☒ is attached hereto ☐ was filed on _____ as United States
Application No. or PCT International Application No. _____
and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
Japan	11-119630	27/04/99	Yes

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Application No.	Filed (Day/Mo./Yr.)	Status (Patented, Pending, Abandoned)
-----------------	---------------------	---------------------------------------

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor TSUKASA SAKO

Inventor's signature _____

Date _____ Citizen/Subject of Japan

Residence 8-5-402, Motoimaizumi 6-chome, Utsunomiya-shi, Tochigi-ken,
Japan

Post Office Address c/o CANON KABUSHIKI KAISHA

30-2, Shimomaruko 3-chome, Ohta-ku, Tokyo, Japan